


# LITETRAC™

## 4K Ultra HD ePTZ Camera

With Facial Detection Auto-Tracking



- **4K Ultra High Definition**—Up to 4K@30fps image output. Backward compatible with 1080P, 720P video resolutions.
- **USB 3.0**—One USB 3.0 interface for the power supply, video output and audio output.
- **Wide-Angle Distortion Free Lens**—Field of View up to 120°
- **Built-in Microphone Array**—Range of up to 35 Feet and implements noise suppression technologies to filter out unwanted sound.
- **Built for Low Light**—Implements noise reduction technologies that produce a clean and clear picture even in ultra-low light conditions.

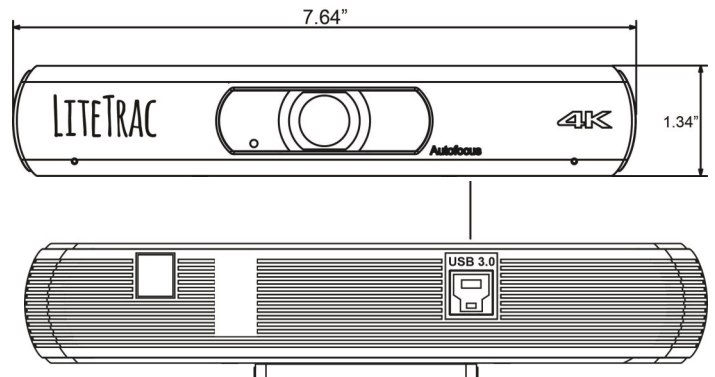

## Technical Information

Operating Systems Supported	Windows / Mac OS / Linux / Android
Built-in Microphone Range	Up to 35 Feet
USB Connection	1 x USB 3.0: Type B, Female
USB Protocol	UVC 1.1
UVC PTZ	Supported (ePTZ)
Input Voltage	5V (USB Power Supply)
Size	7.64" x 1.34" x 1.65" (without bracket)
Net Weight	12 oz.
Power Consumption	3W
Camera Sensor	1/2.5", CMOS, Effective Pixel: 8.25M
Scanning Mode	Progressive
Lens Mount	M12
Lens	Lens Focus: f=2.8mm, Wide Angle: 120°
Shutter	1/30s ~ 1/10000s
Minimal Illumination	0.5 Lux @ (F1.8, AGC ON)
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR
Digital Noise Reduction	2D, 3D Digital Noise Reduction
Backlight Compensation	Supported
Color/Compression	YUY2/MJPEG/H.264



LITETOUCH

12350 Virginia Blvd.  
Ashland, KY 41102

TEL: +1 606-547-8363  
E-MAIL: sales@LTNTechnologies.com

Visit us online at [www.LTNTechnologies.com](http://www.LTNTechnologies.com)



**American  
Owned  
and  
Operated**